

Sensor Fusion for Intuitive Robot Programming

Teck Chew Ng, Lye Seng Wong and Guilin Yang
Singapore Institute of Manufacturing Technology
Industrial Robotics Team, Mechatronics Group
71 Nanyang Drive, Singapore 638075
{tcng,ls Wong,glyang}@SIMTech.a-star.edu.sg

Abstract—Fusion of information from multiple sensors can greatly enhance the performance of human-machine interaction, especially in the intuitive robot programming. The methods aim to allow rapid teaching of robotic tasks in a safe and efficient manner. The techniques can reduce the setup time of a robotic system. This is crucial for SMEs (Small and Medium Enterprise) where the products in the manufacturing area are in small lot size but with high batch mix.

The objective of this research is to fuse the information from a range sensor and a camera. A unique method using the surface constraint has been adopted for the calibration of the sensor fusion system. By taking the surface normal of a calibration board as the common feature, the transformation between the two coordinate systems can be formulated. The end result is a fused scene with both range and texture (color in this case) information. The range information will be used for the path generation for robotic tasks. On the other hand, the images captured by the camera together with the graphical user interface provide an user friendly interface platform for the user. As the two images have been fused, the operator can program a path for a robot to execute by 'point-and-click' on the user interface screen. Experimental results have shown that the new method of robot programming, with sensor fusion information, has improved the robotic teaching process by at least 90% as compared to the manual programming method using teaching pendant.

I. INTRODUCTION

Unlike in the manufacturing floor, for aerospace Maintenance Repair and Overhaul (MRO) industry, the workpieces are normally high mix and in low volume. Because of the above unique characteristics, it is very difficult to have a fully automated robotic system that can handle those large dimensional variation workpieces. Moreover, as the operations of robots are complex, convention methods for robot programming, using teaching pendants, are very tedious for an average operator. Various precaution steps, such as checking of collision of robot with the obstacles in the environment, have to be taken care off. Hence, highly skilled workers are required for these tasks. Furthermore, for MRO applications, it is not cost effective to have a dedicated robotic workcell for a specific type of workpiece. To be economical, the robotic workcell must be flexible enough to cater for high mixed and low volume type of operations. Also, only minimal training should be required for operator handling the programming of robotic tasks. Hence, there is a need to improve the technique for robot programming.

Industrial robot suppliers such as FANUC and ABB have worked out solutions for such a production problem. Software tools such as ROBOGUIDE from FANUC [1] and RoboStudio

from ABB [2] are some commercial solutions. For these systems, however, Computer Aided Design (CAD) drawings, precise workpiece handling tools, and reliable calibration software are needed. In real life, especially in the aerospace industry, CAD drawings may not be available to the MRO companies due to protected sensitivity of the information from the designer. Furthermore, even if the CAD drawings are available, there may exist large discrepancies between the used workpieces and their original drawings.

To tackle the above issues, we propose a method named intuitive robot programming. The main purpose of this method is to allow a cooperation between robot and human operator, so as to enhance the productivity of the operator and at the same time creating a safe environment for robot teaching tasks. To achieve this, perception issues have to be resolved. For the robot, the pose information of the workpiece is important. The range and bearing information of a workpiece relative to the robot can be used for collision avoidance and path planning purposes. On the other hand, for an operator, the texture information on the workpiece is useful for off line programming. Hence, sensor fusion of these two pieces of information is needed to provide these two information to the operator and the robot.

A. Intuitive Robot Programming

Intuitive robot programming concept has been researched in the robotic community. The main purpose is to relieve the burden of tedious robot teaching tasks, using a teaching pendant, from the operator. To achieve this goal, various techniques have been proposed.

Colombo et. al. [3] has implemented a teaching by demonstration method based on the information from the force torque sensor and the feedback of motor currents from a robotic arm. With this method, the human tasks can be transferred to the robot controller. In that, the robotic arm was guided by the human operator through the desired path with the aid of a force torque sensor. The joint coordinates of the robotic arms were recorded throughout the teaching process. The recorded paths were then played back during the execution of the tasks. Ehrenmann et. al. [4] have proposed another concept of teaching by demonstration for a robotic task. The hand actions of an operator working on a dedicated task were tracked by a camera. Beside tracking the posture and position of the hand, the amount of force exerted onto the workpiece by the operator was also captured by a force torque sensor. The

system required a data glove with force sensors. The recorded data are then processed and mapped to a manipulator. On the other hand, Strobel [5] proposed a gesture based intuitive method for a mobile manipulator system that perform cleaning tasks in home environment. Hand gestures by the operator were pre-taught and stored into the database of the system. Upon detecting a pre-defined hand gesture, a specific task will be carried out by the manipulator.

The above systems involved an operator interacting with the robot directly. There are contacts between the robot and the operator, or the operator is working within the vicinity of the robot working envelop. These may not be desirable for safety reasons. Also, for demonstration by teaching method, the operator has to physically guide the robot through the whole process and this may not be easy depending on the reliability and ease of use of the system. Here, we propose a safer and easy robot programming technique. Instead of having an operator guiding the robot through contact method, we digitize the workpiece and project the image onto a monitor screen. The operator can then teach the robot by 'point and click' method. That is, by generating a trajectory for the robot to play back during the execution of task. No teaching pendant (for easy to use) is required and no contact (for safety) between human and robot is required.

B. Sensor Fusion

Machine perception is a major research topic for robotic applications such as unmanned vehicles and robotic assembly systems. Two popular sensors, laser scanner and camera, are used to perceive the environment around the area of interest of the robotic working envelop. Laser scanners provide range information of the environment. Although the scan rate of a laser scanner is typically slow (about 5 frames per second, 90 degree by 90 degree or larger field of view), however, it has good range resolution (up to mm scale). On the other hand, the frame rate of a camera is fast (30fps or higher). However, the range resolution and accuracy of a vision camera are poor. By fusing these two pieces of information, higher resolution range images can be obtained.

Karsten [6] fused the 3D laser data and a rotating line camera image with mechanical fixes. The 3D scanner and the camera images were acquired in sequential steps. Both the 3D scanner and camera were mounted on the same tripod. An assumption that the optical center of the camera is identical to that of the laser scanner was made. The optical alignment was assumed to be guaranteed by an adaptor mounted onto the tripod. This method is tedious, time consuming and not flexible. Also, the assumption made may not be valid as mounting and dismounting of the camera and scanner were needed. Dorian [7] fused the data from a laser range finder and a monocular camera, both mounted on a pan-tilt unit. For this system, the camera was attached to the laser scanner and alignment of the two optical axis was done mechanically. A specially made calibration tool was used. The fusion process involved registering a laser range data with an intensity value from the camera image. The image selection was based on

finding the closest matched images between the laser and camera data. However, the assumption regarding the alignment of the optical axes is sceptical. Forkuo [8] has provided a better solution for fusion of the 3D laser data and the camera image by establishing the correspondences between the two images. Corners in the images were used as the features for data association.

Despite fruitful results obtained in the area of sensor fusion, however, there are some challenges remain unsolved. Fusion methods relying on the mechanical means to align the optical axes of the two sensors are tedious and the results obtained can be affected by the accuracy of the mechanical structures. Fusion methods that used the corner as features for data correspondence may not be reliable due to sensor noises and limitation on the sensor resolution.

The motivation for this research stems from the acceptance that despite numerous technological breakthroughs and demonstrations of advanced robotics — there is unfulfilled potential in mainstream manufacturing. In particular, there is little take-up within SMEs where batch sizes are small and product mix is high. This is because the conventional robotic systems are not flexible and hence difficult to use. The challenge, therefore, is to create technology that will allow rapid and easy set-up of robots to achieve fast turn around times. The approach is to focus on intuitive programming, which involves creating a programming environment so that a typical production worker is able to command a machine based on intuitive concepts such as images or physical interaction. In view of the need of a reliable sensor fusion technique for intuitive robot programming, the main objective of our work is to perform fusion of laser range data with the images from a camera so as to provide an easy to use environment for the robot operator. A calibration method will be investigated for data association of the laser points and the image pixels. The end result is a fused image to aid the operator in the robot programming task. Also, an improvement of 90% in robot programming time is expected.

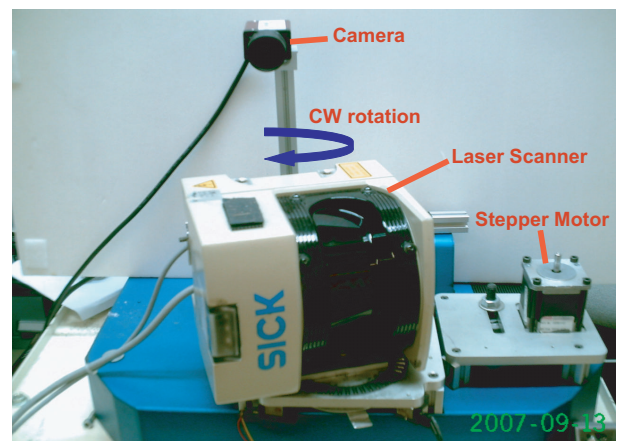


Fig. 1. System setup. A 2D laser scanner is mounted onto a rotating platform driven by a stepper motor. The combination of the 2D scanning and the additional rotating axis provide a 3D scanning effect. A camera is mounted behind the scanning mechanism.

II. SYSTEM SETUP

A. 3D Laser Scanner

In order to achieve a 3D scanning effect, a 2D laser scanner [9] is mounted onto a rotating platform. The platform is driven by a stepper motor. The laser system provides a vertical line scan, scanning from top to bottom. As the platform rotates, the laser scanner rotates accordingly. The result of the 2D laser scanner rotating about a vertical axis will generate a 3D scan of the environment. However, as the laser is a free running system, synchronization of the laser and the platform is required. The output signal from the laser scanner is used as the synchronization pulse to command the stepper to advance to the next step [10]. Two limit switches are used to limit the field of view of the 3D scanner. Figure 1 shows the setup of the 3D scanner. The horizontal and vertical field of views (FOV) of the final system are 90 degree and 60 degree respectively. The vertical and horizontal angle resolution for the 3D scanner are 0.25 degree and 0.18 degree respectively. The range resolution of the system is 1mm.

B. Camera System

A firewire camera is mounted behind the 3D laser scanner system as shown in figure 1. The resolution of the image capture is 640×480 . The position and height of the camera mounting is not critical at this stage and a calibration process is needed. This is an added advantage as the setup of our system is simplified.

C. Problem Definition

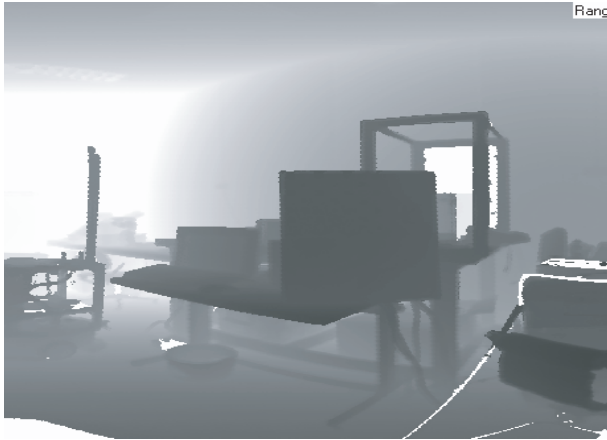


Fig. 2. The result of a 3D laser scanning. Although the laser can provide a dense range and bearing data, however, the texture information, of the objects scanned, are lacking.

Figures 2 and 3 show the 3D laser scanning result and the corresponding camera image respectively. These two images were obtained in one data acquisition cycle. The laser scanner provides range information and on the other hand, the camera provides the textures information about the scene. From figure 2, it is possible to identify the shape of an object using standard edge detection algorithm. Also, it is possible to obtain the poses of the objects with respect to the scanner. However, there

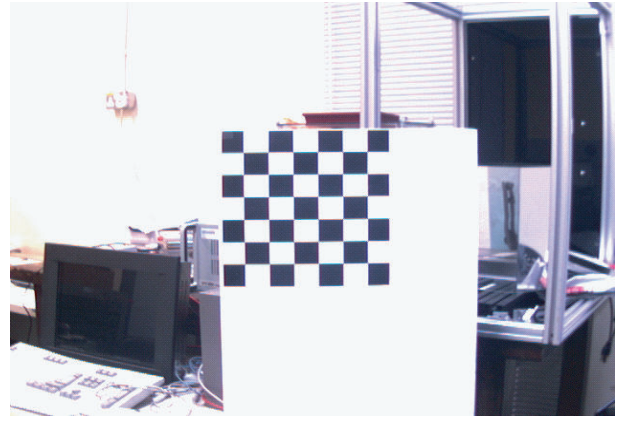


Fig. 3. The image taken by the camera. This image is the corresponding image as shown in figure 2. This image is texture rich but lack in range information.

is no clue on the texture and content on the surfaces of the objects. On the other hand, in figure 3, it is possible to visualize the object of interest, but, without the pose information. For an operator, texture information provides details about the workpiece. For a robot, range information is crucial for task planning. For human-robot cooperation task, the visual information guides the operator in robot programming task and the range information guides the robot through the execution of task programmed by the operator. By combining both the range and texture information, an image with both the pose and context information can be obtained, which enables intuitive robot programming.

III. FUSION STRATEGY

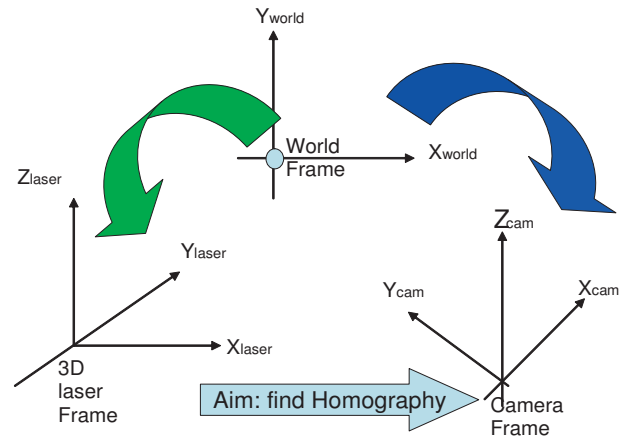


Fig. 4. Relationships among the three coordinate frames: Laser frame, camera frame and the world frame.

To fuse the information from both the 3D scanner and a camera, a common frame of reference is required. Figure 4 shows the relationships among the three coordinate frames.

The world coordinate frame can be taken as the common frame of reference for the two sensors. With the reference frame, calibration of the camera is done to compute both the extrinsic and intrinsic parameters of the camera and scene. By identifying the surface normal of a common calibration board as the common feature for the perception system, sensor fusion is formulated from the homography between the laser and camera frames.

A. Sensor Fusion with Surface Constraints

A common feature is essential for the success of sensor fusion. Intuitively, the edges and lines are the most common features for calibration. However, there are correspondence issues if these features are used. As the two sensors are of different resolution, based on the characteristics and physics of the 3D laser scanner and the camera imaging, a line or an edge that is detected by the 3D laser scanner may not match perfectly to the camera image. It may be possible to match these features by brute force, however, the accuracy of the fusion process will be compromised.

For camera calibration, a well known checker board calibration board has been used extensively in the literature [11]. We have adopted this similar method for calibration of the two sensors. As a board (planar surface) is used, a unique feature, surface normal of the plane, has been identified for calibration between the 3D laser and the vision image. There is an advantage in using surface normal of a plane for the calibration. The surface normal of a plane is view invariant when viewed by either the 3D laser scanner or the camera. That is, the surface normal of a plane remain the same ir-regardless of viewing by the 3D laser scanner or a camera. Thus, there will be no feature association issues in the calibration process.

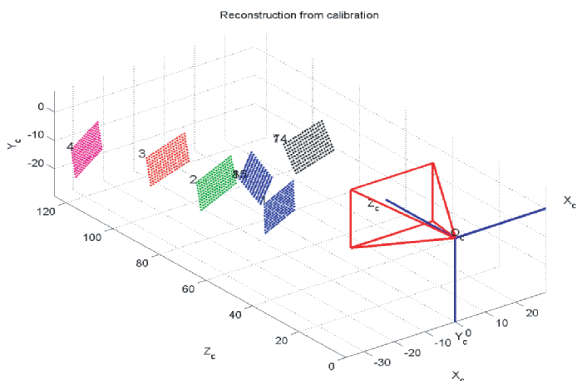


Fig. 5. Calibration procedures for camera. Images of a checker board can be captured by placing the checker board at various positions and orientations within the field of view of both laser scanner and camera.

Having identified a common feature for system calibration, three steps are necessary for the fusion of the information from the two sensors, namely:

- Camera calibration.
- Data transformation for 3D scanner
- Frame transformation/Homography

B. Camera Calibration

The calibration procedure for a camera is a solved problem [11]. A checker board (as shown in figure 3) is used. The intrinsic and extrinsic parameters of the camera can be obtained from the standard camera calibration procedures available in the literature.

C. Data transformation for 3D scanner

This involves the conversion of the polar information from the laser scanner to world coordinate. For the system setup as shown in figure 1, the laser is scanning horizontally from -45 degree to 45 degree and -30 degree to 30 degree vertically. The world coordinate of a laser point with respect to the laser frame can be computed using the sine and cosine rules.

D. Frame Transformation/Homography

To find the homography between the two frames of different sensors, the following steps are carried out.

The checker box images are captured by the two sensors. For best results, the calibration board has to be placed at different locations and at various orientations within the field of view of the two sensors as shown in figure 5.

By using the camera calibration procedures outlined in [11], the intrinsic parameters of the camera can be obtained. For each of the poses of the calibration board, the extrinsic parameters (ie rotation and translation matrices) of the board can be obtained.

The projection of a point P in the world frame to a point p in the image frame is represented as:

$$p = C^I(RP + t) \quad (1)$$

where C^I is the 3×3 intrinsic matrix for the camera, R is a 3×3 orthonormal (rotation) matrix representing the orientation of the camera with respect to the world frame and t is a 3×1 vector (translation) representing the relative position of the camera frame from the world frame.

The surface normal of the calibration board is

$$N_c = [R_3 \quad -R_3^T t] \quad (2)$$

where R_3 is the 3^{rd} column of rotation matrix R .

Similarly, for each of the poses of the calibration board, the surface normal of the calibration board (ie a plane) with respect to the laser scanner can be obtained by using RANSAC [12] plane fitting algorithm.

Now, in laser coordinate system, consider a point, X , in 3D space lying on a plane, π . Based on the equation of a plane,

$$\pi X = 0 \quad (3)$$

For the same point X , its corresponding coordinate, X^c in the camera frame is

$$X^c = HX \quad (4)$$

where H is the transformation from laser frame to camera frame.

The aim of the calibration process is to find a solution for this transformation, H .

Mathematically,

$$\begin{aligned} \text{if } \pi X = 0, \quad \text{then} \\ \pi^T H^{-1} H X = 0 \end{aligned} \quad (5)$$

Hence,

$$(H^{-T} \pi^T)^T H X = 0 \quad (6)$$

From equations 4 and 6, we have

$$(H^{-T} \pi^T)^T X^c = 0 \quad (7)$$

Note that equation 7 is another plane equation. Hence, we can conclude that the point X^c is a point on the plane $H^{-T} \pi^T$ (figure 6).

H can be solved through the above calibration procedures using multiple planes data obtained from both laser and camera.

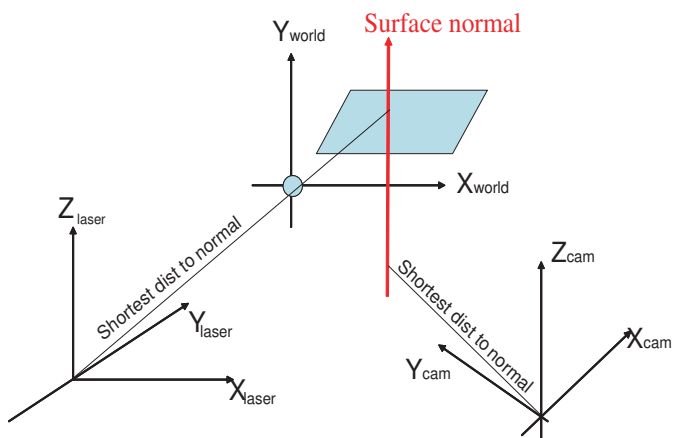


Fig. 6. Representation of surface normal of a plane as common feature to both the scanner and the camera.

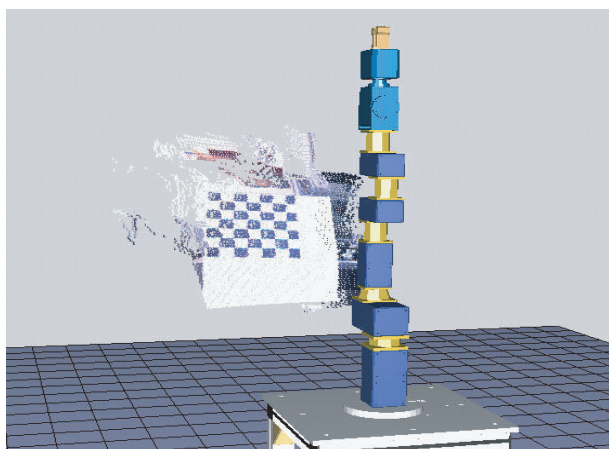


Fig. 7. Fusion result of figures 2 and 3.

IV. INITIAL RESULTS

For verification of the new fusion concept, a MATLAB program was written to implement the algorithm as outlined in section III. For demonstration of the intuitive robot programming concept, a modular robot was setup for this purpose. The 3D laser system was mounted side-by-side with the modular robot. Another program for 3D rendering and modular robot control was written in 'C' together with OPENGL library.

A calibration process between the robotic arm and the fusion system is needed. This is carried out by mounting a flat calibration board onto the robotic arm. The pose of the board can be obtained from the encoder readings of the arm. Also, the surface normal of the calibration board can be computed off the 3D laser data. With these two information, the transformation matrix between the robot frame and the fusion system frame can be computed.

Figure 7 shows the initial fusion result of figures 2 and 3. Both the range and texture contents were plotted in a 3D environment. From figure 7, it was observed that some texture information in the checker-board were missing. The missing data are due to the over-range readings from the scanner. The laser scanner will report over range value if there is no laser signal reflected back from a surface. For this particular checker-board, the checker-board is colored black and hence, no laser is reflected back to the laser receiver.

Figure 8 shows the result of fusion for a cabinet. Observed that the edges of the cabinet is clearly displayed in the fused data. Also, the fused image shows as much information as the actual 2D image. If only 3D range is presented, it is impossible to visualize every small detail in the scan. Alternatively, if only camera image is being used, there will be no range information for the robot to work on the workpiece.

A modular robot was used to demonstrate the intuitive robot programming concept. Figure 9 shows the 3D laser scan and the robot. The image in the middle shows the fused image. This image will be shown during the intuitive robot path teaching process. A path can be created by clicking onto the surface of the scanned workpiece via this user interface. A path is then converted to the robot coordinates for execution.

Initial testing run of the algorithm is satisfactory. The inset images in figure 9 show the robot executed position of the robot at various location along the taught path.

To further quantify the setup time improvement of the new method, a Motorman robot was used as shown in figure 10. The time taken for an operator to teach, using a teaching pendant, a robot path of 5 teaching points took about 5 minutes. By using the new intuitive method, it took about 20 seconds for the perception system to scan and fuse the information of the workpiece and less than 10 seconds for an operator to create a path of 5 intermediate points. Hence, the setup time for robot teaching is improved using the intuitive robot programming method with sensor fusion data.

V. CONCLUSION

Sensor fusion of the 3D laser data and the camera image has been achieved. A checker-board calibration board has been

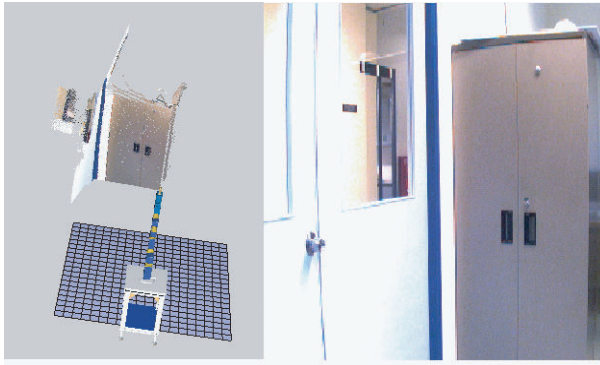


Fig. 8. Fusion of a large 'workpiece'. Image on the left shows the 3D rendering of the fused data. Image on the right is the picture captured by the camera.

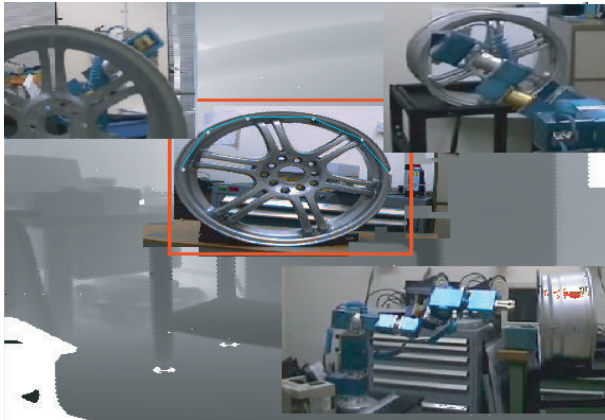


Fig. 9. Sensor fusion applied to intuitive robot programming. The operator has created 5 teaching points on the user interface screen. The robot is able to 'played back' path taught by the operator without hitting the workpiece.

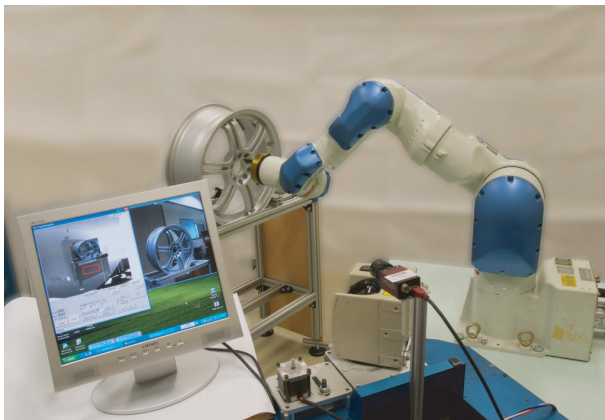


Fig. 10. Demonstration of Sensor fusion applied to intuitive robot programming using Motorman Robot. The setup times for teaching the robot using a teaching pendant and the new teaching methods are compared.

used as a calibration tool for the fusion process. The surface normal of this board is identified as a key feature for the calibration process. The fusion algorithm has been presented. With the fused image, both the range and texture information are obtained simultaneously.

By fusing the images from the 3D scanner and the camera, it has been demonstrated that it is possible to have an intuitive way of programming the robot for a task by simply clicking on the user interface screen. The setup time of the robot programming has been improved by more than 90% as compared to the manual teaching method using a teaching pendant.

As this is only the initial stage of the research, only the efficiency of the intuitive robot programming is quantified. A metric to quantify the performance of the fusion algorithm will be investigated. This metric will provide a measurable performance of the fused results and the new robot programming method.

ACKNOWLEDGMENT

The authors would like to thank Dr Andrew Shacklock (shacklap@projective-space.com) for his valuable suggestions and comments for this work.

REFERENCES

- [1] FANUC, *Intelligent Tool for Robot Systems: FANUC ROBOGUIDE*, <http://www.fanuc.co.jp/en/product/>, 2005
- [2] ABB, *Offline programming using the Virtual Robot Technology is just like having the real robot on your PC!*, <http://www.abb.com/product/>
- [3] D. Colombo, D. Dallefrate and L.M. Tosatti, *PC based control systems for compliance control and intuitive programming of industrial robots*, VDI-Wissensforum et al.: ISR 2006 - ROBOTIK 2006 : Proceedings of the Joint Conference on Robotics, Munich, May 15-17, 2006.
- [4] M. Ehrenmann, R. Zollner and S.Knoop, *Sensor Fusion Approaches for Observation of User Actions in Programming by Demonstration*, In Proceedings of the 2001 International Conference on Multi Sensor Fusion and Integration for Intelligent Systems (MFI), volume 1, pages 227232, Baden-Baden, 19.22. August 2001.
- [5] M Strobel, J. Illmann and E. Prassler, *Intuitive Programming of a Mobile Manipulator System Designed for Cleaning Tasks in Home Environments*, Proceedings of International Conference on Field and Service Robotics, Helsinki University of Technology (HUT), June 2001
- [6] K. Scheibe, M. Scheele and R. Klette, *Data fusion and visualization of panoramic images and scans*, Proceedings of the ISPRS working group V/1, Panoramic Photogrammetry Workshop, Vol XXXIV, Part 5/W16, Dresden, 19-22 Feb 2004
- [7] J.S Dorian, A.J Jarvis, *3D Vision for Large-Scale Outdoor Environment*, Proceedings of Australian Conference on Robotics and Automation, pp. 228-233, 2002
- [8] E.K Forkuo and B. King, *Automatic Fusion of Photogrammetric Imagery and Laser Scanner Point Clouds*, Proceedings, 2004 ISPRS Annual Conference, paper 475 (CD version).
- [9] *SICK Optics: <http://www.sick.com>*
- [10] T.C Ng, J.I Guzman and J.C Tan, *Development of a 3D LADAR system for autonomous navigation*, IEEE Conference on Robotics, Automation and Mechatronics, Vol 2, pp. 792-797, 2004
- [11] R.Y Tsai, *An Efficient and Accurate Camera Calibration Technique for 3D Machine Vision.*, IEEE Computer Vision and Pattern Recognition, pp.364-374 1987.
- [12] M. A. Fischler and R. C. Bolles. *Random Sample Consensus: A Paradigm for Model Fitting with Applications to Image Analysis and Automated Cartography*, Comm. of the ACM, Vol 24, pp 381-395, 1981.